


- A: MATERIAL:
- HOUSING: PBT WITH 30% GF UL 94V-2
 - TERMINAL: COPPER ALLOY

- B: CHARACTERISTICS:
- RATING: 10A250V AC EUROPE
15A250V AC NORTH AMERICA
 - INSULATION RESISTANCE: OVER 100MΩ 500V DC
DIELECTRIC STRENGTH: 2000V AC 0.5mA, 1 MINUTE

C: APPROVALS:
UL, CSA, VDE, DEMKO, SEMKO, SEV, FIMKO & NEMKO CCC, KTL

D: ORDERING OPTIONS:

ORDER#	ITEM REQ.	TERMINAL
2107-CSP1-G	① + ②	Q. D TABS

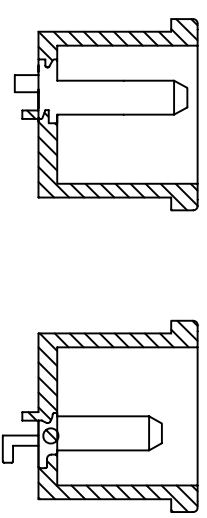

3	T-07LBI-N	TERMINAL	2PCS		COPPER ALLOY	NI-PLATED
2	T-07LA3	TERMINAL	1PCS		COPPER ALLOY	NI-PLATED
1		HOUSING	5.4g	SNAP-IN TYPE	PBT+30%GF	THERMOPLASTIC
ITEM	PART NO.	PART NAME	QTY	SPECIFICATION	MATERIAL	REMARKS

深圳市仁达电子有限公司
SHEN ZHEN STEADY ELECTRONICS CORPORATION

PART NO.: 2107-CSP1-G
NAME: AC INLET 3P

TOLERANCE UNLESS OTHERWISE MARKED
DIMENSION: ANGULAR ±0.5

0~6 : ±0.1
6~30 : ±0.2
30~120 : ±0.3

REV	DATE	DESCRIPTION	WRITE	APPD.	UNIT:	SCALE	SHEET	APPROVED	CHECKED	DRAW BY	JOB NO.:
A.1	2008.04.26	增加边框外形标准	侯锡强		mm	1:1	1 OF 1			侯锡强	
A.0	2008.02.22	RE DRAWING	侯锡强								
REV	DATE	DESCRIPTION	WRITE	APPD.							