


- A: MATERIAL:
 1. HOUSING: PBT+30%GF FLAMMABILITY UL 94V-0
 2. TERMINAL: COPPER ALLOY


- B: CHARACTERISTICS:
 1. RATING: 2.5A/250V AC EUROPE/ASIA
 7A/125V AC NORTH AMERICA
 2. INSULATION RESISTANCE: OVER 100MΩ 500VDC
 DIELECTRIC STRENGTH: 2000V AC 1 MINUTE

- C: APPROVALS:
 UL, CSA, VDE, DEMKO, SEMKO, SEV, FIMKO & NEMKO CCC
 KTL

ITEM	PART NO.	PART NAME	QTY	SPECIFICATION	MATERIAL	REMARKS
3	T-23-RS1	TERMINAL	1 SET	SOLDERING	BRASS	Tin-plated
2	T-20-1P	TERMINAL	1 SET	Ø 3.16	BRASS	Ni-plated
1	H-23-PR	HOUSING	1 pos	UL94V-2	THERMOPLASTIC	

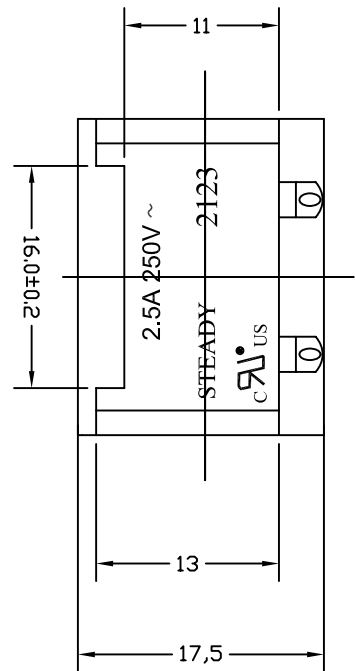

REV	DATE	MODIFY

 深圳市仁达电子有限公司 SHEN ZHEN STEADY ELECTRONICS CORPORATION		PART NO.: 2123-PSR-G		NAME: SNAP-IN TYPE AC INLET 2P	
TOLERANCE UNLESS OTHERWISE MARKED DIMENSION: 0~6 : ±0.1 6~30 : ±0.2 30~120: ±0.3		MATERIAL: SEE ABOVE		SPEC.: —	
ANGULAR ±0.5		APPROVED		CHECKED	
SCALE 1:1		DRAW BY 侯锡强		DATE 07/11/28	
UNIT: mm		SHEET 1 OF 1		NOTE:	
4		JOB NO.:			