


PANEL CUT-OUT

- A: MATERIAL:  
 1. HOUSING: PBT+30%GF FLAMMABILITY UL 94V-0  
 2. TERMINAL: COPPER ALLOY

- B: CHARACTERISTICS:  
 1. RATING: 2.5A250V AC EUROPE/ASIA  
 7A125V AC NORTH AMERICA  
 2. INSULATION RESISTANCE: OVER 100MΩ 500VDC  
 DIELECTRIC STRENGTH: 2000V AC 1 MINUTE

C: APPROVALS:  
 UL, CSA, VDE, DEMKO, SEMKO, SEV, FIMKO& NEMKO CCC

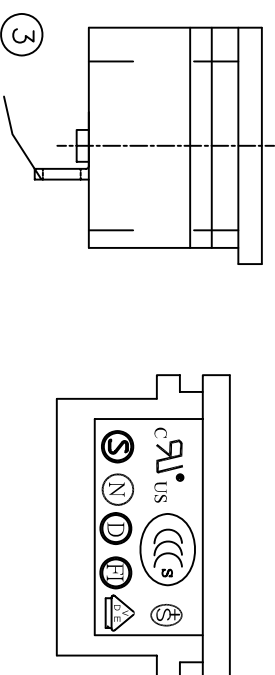

ITEM	PART NO.	PART NAME	QTY	SPECIFICATION	MATERIAL	REMARKS
3	T-21-RS	TERMINAL	1 SET	Ø 3.16	BRASS	Tri-plated
2	T-21-1P	TERMINAL	1 SET	Ø 3.16	BRASS	
1	H-23-P	HOUSING	1 pcs	UL94V-2	THERMOPLASTIC	

**深圳市仁达电子有限公司**  
 SHEN ZHEN STEADY ELECTRONICS CORPORATION

PART NO.: 2123-PS-P-G  
 NAME: SNAP-IN TYPE AC INLET 2P

TOLERANCE UNLESS OTHERWISE MARKED  
 DIMENSION: 0~6 : ±0.1  
 6~30 : ±0.2  
 30~120 : ±0.3  
 ANGULAR ±0.5

MATERIAL: SEE ABOVE  
 SPEC.:  
 APPROVED: \_\_\_\_\_  
 CHECKED: \_\_\_\_\_  
 DRAW BY: 侯锡强  
 DATE: 07.11.28  
 NOTE:

REV	DATE	MODIFY

UNIT	SCALE	SHEET
mm	1:1	1 OF 1

JOB NO.: