


PANEL CUT-OUT

- A: MATERIAL:  
 1. HOUSING: PBT+30%GF FLAMMABILITY UL 94V-0  
 2. TERMINAL: COPPER ALLOY

- B: CHARACTERISTICS:  
 1. RATING: 2.5A250V AC EUROPE/ASIA  
           7A125V AC NORTH AMERICA  
 2. INSULATION RESISTANCE: OVER 100MΩ 500VDC  
 DIELECTRIC STRENGTH: 2000V AC 1 MINUTE

C: APPROVALS:  
 UL, CSA, VDE, DEMKO, SEMKO, SEV, FIMKO & NEMKO CCC

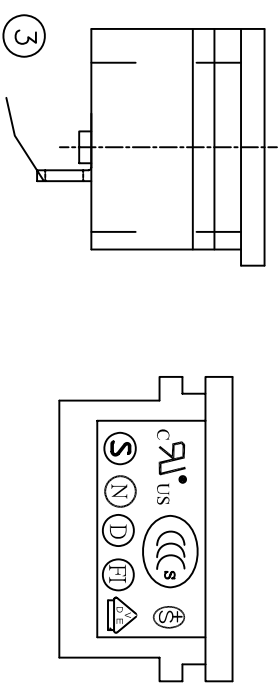

| ITEM | PART NO. | PART NAME | QTY   | SPECIFICATION | MATERIAL      | REMARKS    |
|------|----------|-----------|-------|---------------|---------------|------------|
| 3    | T-21-RS  | TERMINAL  | 1 SET | Ø 3.16        | BRASS         | Tin-plated |
| 2    | T-21-IP  | TERMINAL  | 1 SET | Ø 3.16        | BRASS         |            |
| 1    | H-23-IP  | HOUSING   | 1 pcs | UL94V-2       | THERMOPLASTIC |            |

**深圳市仁达电子有限公司**  
 SHEN ZHEN STEADY ELECTRONICS CORPORATION

PART NO.: **2123-PS-G** NAME: SNAP-IN TYPE AC INLET 2P

TOLERANCE UNLESS OTHERWISE MARKED  
 DIMENSION: ANGULAR ±0.5  
 0~6 : ±0.1  
 6~30 : ±0.2  
 30~120 : ±0.3

MATERIAL: SEE ABOVE  
 SPEC.:  
 APPROVED CHECKED DRAW BY NOTE:

| REV | DATE | MODIFY |
|-----|------|--------|
|     |      |        |
|     |      |        |
|     |      |        |

UNIT: mm SCALE 1:1 SHEET 1 OF 1

侯锡强 07/12/15

JOB NO.: