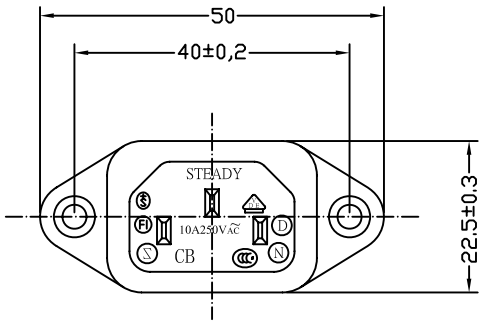

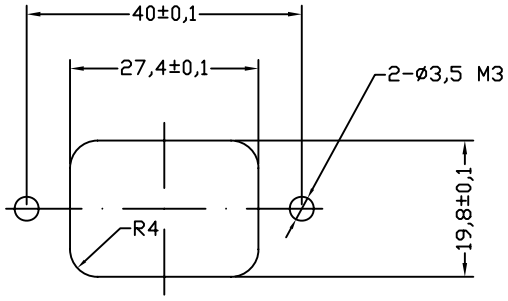

FOR FRONT MOUNTING USE

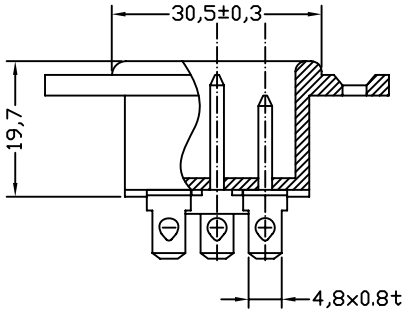

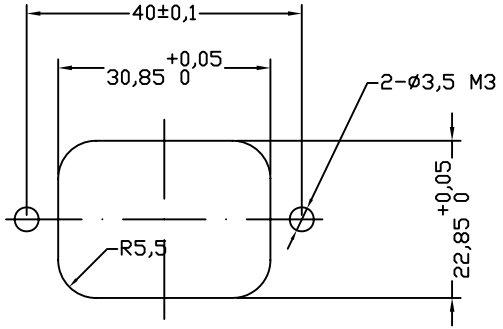

FOR REAR MOUNTING USE

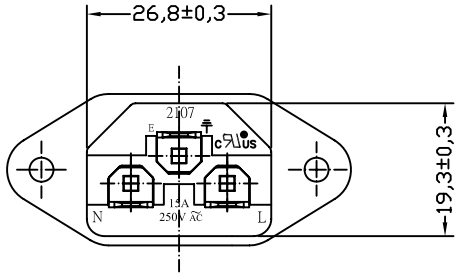

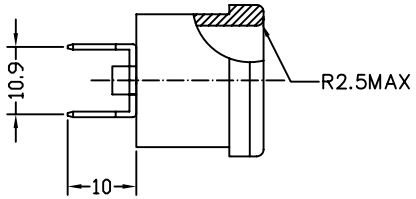

A:MATERIAL:
1. HOUSING:PBT WITH 30%GF UL 94V-0
2. TERMINAL:COPPER ALLOY
B:CHARACTERISTICS:
1. RATING:10A250V AC EUROPE
15A125V AC NORTH AMERICA
2. INSULATION RESISTANCE, DIELECTRIC STRENGTH
MOUNTING TORQUE STRENGTH (Ø3 SCREW)
PER APPROVAL SHEET
C:APPROVALS:
UL, CSA, VDE, DEMKO,SEMKO, SEV ,FIMKO& NEMKO CCC
D:ORDERING OPTIONS:

ORDER#	ITEM REQ.	TERMINAL
2107-CQB-G	1+2	4.8 SOLDER/Q.D. TABS

ITEM	PART NO.	PART NAME	Q'TY	SPECIFICATION	MATERIAL	REMARKS
4	T-07RQ	TERMINAL	3PCS	Ø4.8wx0.8t	COPPER ALLOY	TIN-PLATED
3	T-07PB	TERMINAL	2PCS		COPPER ALLOY	TIN-PLATED
2	T-07PA	TERMINAL	1PCS		COPPER ALLOY	TIN-PLATED
1	H-07-C-B-G	HOUSING	1PCS	SNAP-IN TYPE	PBT+30%GF	THERMOPLASTIC

REV	DATE	DESCRIPTION	WRITE	APPD.
A.0	2008.02.22	RE DRAWING	侯锡强	

深圳市仁达电子有限公司
SHEN ZHEN STEADY ELECTRONICS CORPORATION

TOLERANCE UNLESS OTHERWISE MARKED
DIMENSION: ANGULAR
0 ~ 6 : ±0.1 ±0.5
6 ~30 : ±0.2
30~120: ±0.3

A4 | UNIT: mm | SCALE 1:1 | SHEET 1 OF 1

PART NO.: 2107-CQB-G

NAME: SCREW-MOUNT AC INLET

MATERIAL: SEE ABOVE

SPEC.: —

APPROVED	CHECKED	DRAW BY	JOB NO.:
		侯锡强 08/02/22	