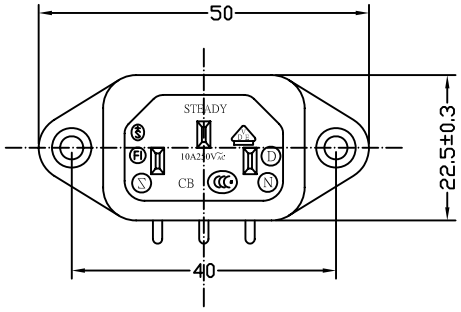

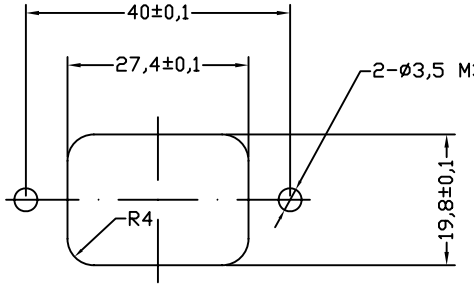

FOR FRONT MOUNTING USE

A: MATERIAL:
1. HOUSING: PBT WITH 30%GF UL 94V-2
(UL 94V-0 ON REQUEST)
2. TERMINAL:COPPER ALLOY
B:CHARACTERISTICS:
1. RATING:10A250V AC EUROPE
15A125V AC NORTH AMERICA
2. INSULATION RESISTANCE, DIELECTRIC STRENGTH
MOUNTING TORQUE STRENGTH (ø3 SCREW)
PER APPROVAL SHEET
C:APPROVALS:
UL, CSA, VDE, DEMKO,SEMKO, SEV ,FIMKO& NEMKO CCC
D:ORDERING OPTIONS:

ORDER#	ITEM REQ.	TERMINAL DIFFERENCE	DIM. X
2107-2-C71-G	1+2	PCB MOUNTING FOR PITCH 7.0	5

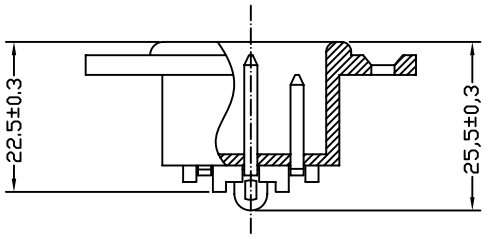

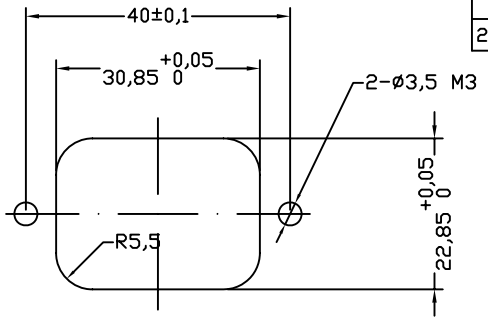

FOR REAR MOUNTING USE



PCB LAYOUT

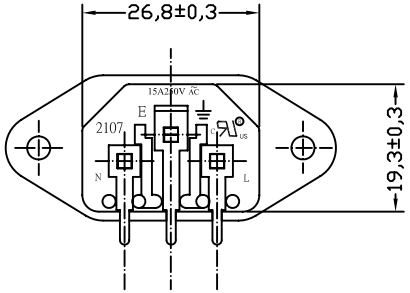



ITEM	PART NO.	PART NAME	Q'TY	SPECIFICATION	MATERIAL	REMARKS
5	T-07PA	TERMINAL	1PCS		COPPER ALLOY	TIN-PLATED
4	T-07PB	TERMINAL	2PCS		COPPER ALLOY	TIN-PLATED
3	T-11PA1	TERMINAL	1PCS	P. C. B	COPPER ALLOY	TIN-PLATED
2	T-11P7B1	TERMINAL	2PCS	P. C. B	COPPER ALLOY	TIN-PLATED
1	H-07-2C-G	HOUSING	1PCS	SCREW-IN TYPE	PBT+30%GF	THERMOPLASTIC

深圳市仁达电子有限公司
SHEN ZHEN STEADY ELECTRONICS CORPORATION

TOLERANCE UNLESS OTHERWISE MARKED
DIMENSION: ANGULAR
0 ~ 6 : ±0.1 ±0.5
6 ~30 : ±0.2
30~120: ±0.3

PART NO.: 2107-2-C71-G
NAME: AC INLET 3P PCB MOUNTING TYPE
MATERIAL: SEE ABOVE
SPEC.: —

APPROVED	CHECKED	DRAW BY	JOB NO.:
		侯锡强 08/02/21	

REV	DATE	DESCRIPTION	WRITE	APPD.
A. 0	2008. 02. 21	RE DRAWING	侯锡强	

A4 | UNIT: mm | SCALE 1:1 | SHEET 1 OF 1