

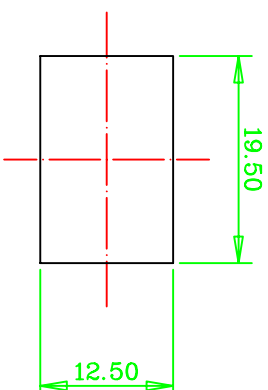


THICKNESS: 1.65t



PANEL
CUT-OUT





- A: MATERIAL:
 1. HOUSING: PBT WITH +30% GLASS FIBER UL 94V-0
 2. TERMINAL: COPPER ALLOY

- B: CHARACTERISTICS:
 1. RATING: 2.5A 250V AC
 2. INSULATION RESISTANCE: OVER 100MΩ AT 500V DC
 3. DIELECTRIC STRENGTH : 2000V AC ONE MINUTE

C: APPROVALS:
 UL, CSA, VDE, SEMKO, SEV , NEMKO, CCC

ITEM	PART NO.	PART NAME	QTY	SPECIFICATION	MATERIAL	REMARKS
2	T-21S	TERMINAL HOUSING	2 pcs	SOLDER TYPE	COPPER ALLOY	TIN-PLATED
1	H-21-3-P	HOUSING	1	SNAP-IN TYPE	PBT+30 %GF	UL 94V-0

 深圳市仁达电子有限公司 SHENZHEN ZHEN STEADY ELECTRONICS CORPORATION		PART NO.: 2121-3-PS-G		NAME: SNAP-IN TYPE AC INLET 2P	
TOLERANCE UNLESS OTHERWISE MARKED DIMENSION: 0 ~ 6 : ±0.1 6 ~ 30 : ±0.3 30 ~ 120 : ±0.5		MATERIAL: SEE ABOVE		SPEC.:	
ANGULAR ±0.5		APPROVED	CHECKED	DRAW BY 侯锡强 07.11.28	REV.: A
UNIT: mm	SCALE 1:1	SHEET 1 OF 1		JOB NO.:	



4