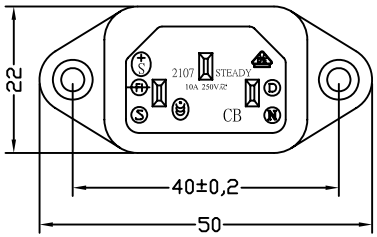

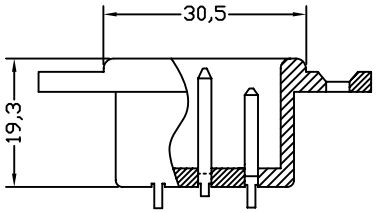

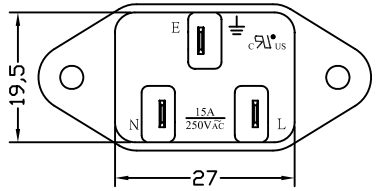



FOR FRONT MOUNTING USE

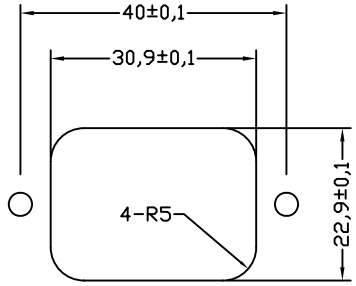

FOR REAR MOUNTING USE

PANEL CUT-OUT

A: MATERIAL:
1. HOUSING: PBT WITH 30% GF UL 94V-2
2. TERMINAL:COPPER ALLOY

B:CHARACTERISTICS:
1. RATING:10A250V AC EUROPE
15A250V AC NORTH AMERICA
2. INSULATION RESISTANCE:OVER 100MΩ 500V DC
DIELECTRIC STRENGTH:2000V AC 0.5mA ,1 MINUTE

C:APPROVALS:
UL, CSA, VDE, DEMKO,SEMKO, SEV ,FIMKO& NEMKO CCC
D:ORDERING OPTIONS:

ORDER#	ITEM REQ.	TERMINAL
2107-CSL	① + ②	SOLDIER TABS



ITEM	PART NO.	PART NAME	Q'TY	SPECIFICATION	MATERIAL	REMARKS
3	T-07LB1-N	TERMINAL	2PCS		COPPER ALLOY	NI-PLATED
2	T-07LA3	TERMINAL	1PCS		COPPER ALLOY	NI-PLATED
1	PBT-301G30	HOUSING	7.2g	SNAP-IN TYPE	PBT+30%GF	THERMOPLASTIC

REV	DATE	DESCRIPTION	WRITE	APPD.
A. 0	2008. 02. 22	RE DRAWING	侯锡强	

深圳市仁达电子有限公司
SHEN ZHEN STEADY ELECTRONICS CORPORATION

TOLERANCE UNLESS OTHERWISE MARKED
DIMENSION: ANGULAR
0 ~ 6 : ±0.1 ±0.5
6 ~30 : ±0.2
30~120: ±0.3

A4	UNIT: mm	SCALE 1:1	SHEET 1 OF 1

PART NO.: 2107-CSL-G

NAME: AC INLET 3P

MATERIAL: SEE ABOVE

SPEC.: —

APPROVED	CHECKED	DRAW BY	JOB NO.:
		侯锡强 08/02/22	