


- A: MATERIAL:  
 1. HOUSING: PBT+30%GF UL 94V-0  
 2. TERMINAL: COPPER ALLOY
- B: CHARACTERISTICS:  
 1. RATING: 10A250V AC EUROPE  
 15A250V AC NORTH AMERICA  
 2. INSULATION RESISTANCE: OVER 100MΩ 500V DC  
 DIELECTRIC STRENGTH: 2000V AC 0.5mA, 1 MINUTE
- C: APPROVALS:  
 UL, CSA, VDE, DEMKO, SEMKO, SEV, FIMKO& NEMKO CCC KTL

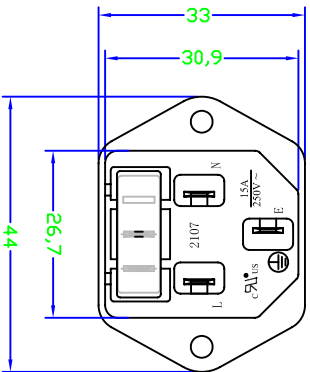

4	M6-3H11 C-5-BBNA	POWER SWITCH	1PCS				
3	T-070B	TERMINAL	2PCS	Ø4.8xØ0.8	COPPER ALLOY	TIN-PLATED	
2	T-070A	TERMINAL	1PCS	Ø4.8xØ0.8	COPPER ALLOY	TIN-PLATED	
1	PBT-30IG30	HOUSING	7g	SNAP-IN TYPE	DBT-30GF	THERMOPLASTIC	
ITEM	PART NO.	PART NAME	QTY	SPECIFICATION	MATERIAL	REMARKS	

<b>深圳市仁达电子有限公司</b> SHENZHEN STEADY ELECTRONICS CORPORATION		<b>PART NO.:</b> 2107-CQ-1S-G		<b>NAME:</b> SCREW-MOUNT AC INLET WITH SWITCH	
<b>TOLERANCE UNLESS OTHERWISE MARKED</b> DIMENSION: 0 ~ 6 : ±0.1 6 ~ 30 : ±0.2 30 ~ 120 : ±0.3		<b>MATERIAL:</b> SEE ABOVE		<b>SPEC.:</b> _____	
APPROVED	CHECKED	DRAW BY	JOB NO.:		

A.0	2008.02.21	RE-DRAWING	侯锡强	
REV	DATE	DESCRIPTION	WRITE	APPD.

4	A		UNIT: mm	SCALE 1:1	SHEET 1 OF 1	APPROVED	CHECKED	DRAW BY 侯锡强	JOB NO.:
---	---	--	-------------	--------------	-----------------	----------	---------	----------------	----------