


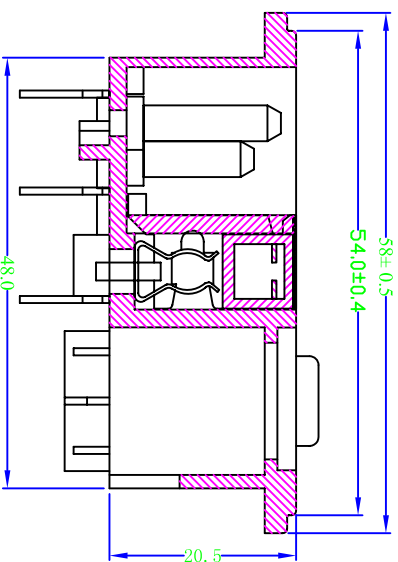


- A: MATERIAL:
 1. HOUSING: PA66 UL 94V-2 STD(94V-0 REQUEST)
 2. TERMINAL: COPPER ALLOY
- B: CHARACTERISTICS:
 1. RATING: 10A250V AC
 2. INSULATION RESISTANCE: 100M Ω 500V DC
 DIELECTRIC STRENGTH:
 AC2000V 0.5mA 1 MINUTE
 3. FUSE: Ø5x20mm
- C: APPROVALS:
 CCC UL CSA VDE



ITEM	PART NO.	PART NAME	QTY	SPECIFICATION	MATERIAL	REMARKS
4		ROCKER SWITCH	1	ARCO TR8550VB		
3	T-17-1-Q	TERMINAL	1 SET	4.8x0.8t	COPPER ALLOY	TIN-PLATED
2	H-13FH	FUSE HOLDER	1	Ø5x20mm	PA 66	
1	H-17-1-CS	HOUSING	1	SNAP-IN TYPE	PA 66	SCREW MOUNTING

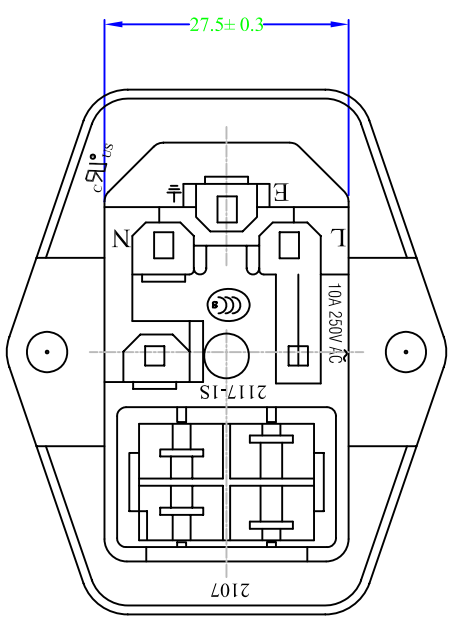

深圳市仁达电子有限公司
 SHEN ZHEN SHEN STEADY ELECTRONICS CORPORATION

PART NO.: 2117-1S-CQ-6
 NAME: AC INLET 3P WITH FUSE/SWITCH

MATERIAL: SEE ABOVE
 SPEC: _____

TOLERANCE UNLESS OTHERWISE MARKED
 DIMENSION: ANGULAR ±0.5
 .000 : ±0.1
 .00 : ±0.3
 .0 : ±0.5

APPROVED: _____
 CHECKED: _____
 DRAWN: 侯锡强
 07/11/28

UNIT: mm
 SCALE: 1:1
 SHEET: 1 OF 1

JOB NO.: