



- A: MATERIAL:
 1. HOUSING: PBT WITH GLASS FIBER FILLER UL 94V-0
 2. TERMINAL: COPPER ALLOY
- B: CHARACTERISTICS:
 1. RATING: 10A/250V AC EUROPE/NORTH AMERICA
 15A/125V AC NORTH AMERICA
2. INSULATION RESISTANCE, DIELECTRIC STRENGTH
 MOUNTING TORQUE STRENGTH (Ø3 SCREW)
 PER APPROVAL SHEET
- C: APPROVALS:
 UL, CSA, VDE, DEMKO, SEMKO, SEV, FIMKO & NEMKO CCC
 D: RECOMMENDED DIMENSIONS FOR MOUNTING HOLE
 ON CHASSIS

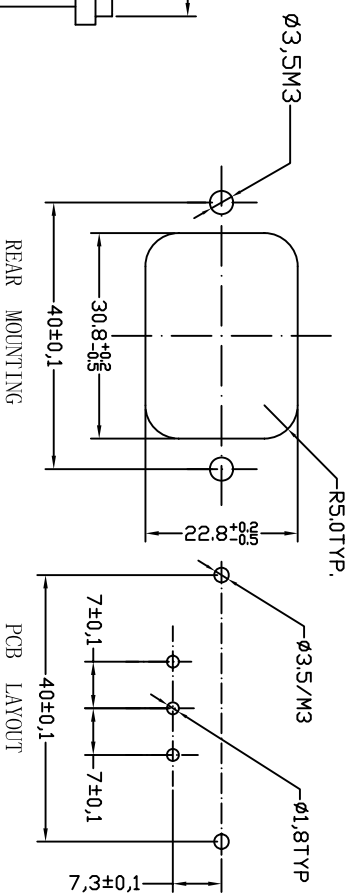

| ITEM | PART NO. | PART NAME | QTY | SPECIFICATION | MATERIAL | REMARKS |
|------|----------|-----------|-------|---------------|--------------|------------|
| 2 | T-14R2 | TERMINAL | 1 SET | Ø1,7x4L | COPPER ALLOY | TIN-PLATED |
| 1 | H-14C2 | HOUSING | 1 | PCB MOUNTING | PBT-GF | UL 94V-0 |

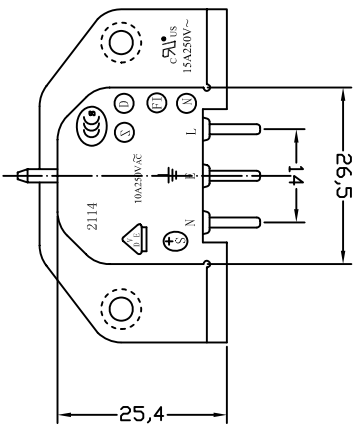

深圳市仁达电子有限公司
 SHEN ZHEN STEADY ELECTRONICS CORPORATION

TOLERANCE UNLESS OTHERWISE MARKED
 DIMENSION:
 0 ~ 6 : ±0.1
 6 ~ 30 : ±0.3
 30 ~ 120 : ±0.5

PART NO.: 21114-CP7-G
 NAME: AC INLET 3P PCB MOUNTING TYPE

MATERIAL: SEE ABOVE
 SPEC: _____

APPROVED: _____
 CHECKED: _____
 DRAW BY: 侯锡强
 REV: A

| UNIT: | SCALE | SHEET | JOB NO.: |
|-------|-------|--------|----------|
| mm | 1:1 | 1 OF 1 | 07.11.28 |