
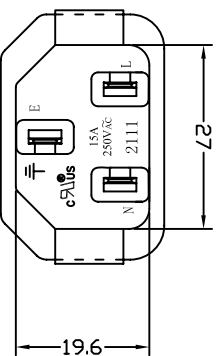
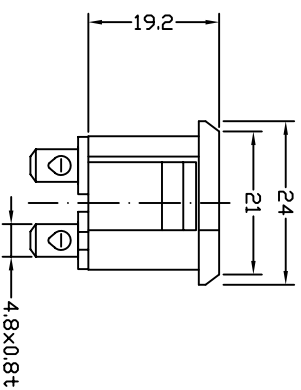


PANEL CUT

底座厚度	L0
0.8±0.1	32.3
1.0±0.1	32.8
1.2±0.1	33.4
1.6±0.1	34.4



- A: MATERIAL:  
 1. HOUSING: NYLON 66 FLAMMABILITY UL 94V-0  
 2. TERMINAL: COPPER ALLOY

- B: CHARACTERISTICS:  
 1. RATING: 10A250V AC EUROPE  
           15A250V AC NORTH AMERICA  
 2. INSULATION RESISTANCE: OVER 100MΩ 500VAC  
 DIELECTRIC STRENGTH: 2000V AC 1 MINUTE

- C: APPROVALS:  
 UL, CSA, VDE, DEMKO, SEMKO, SEV, FIMKO & NEMKO CCC  
 D: ORDERING OPTIONS:

ORDER#	ITEM	REQ.	TERMINAL DIFFERENCES
2111-PQ6-G	① + ②	4.8	SOLDER/Q.D. TABS

ITEM	PART NO.	PART NAME	QTY	SPECIFICATION	MATERIAL	REMARKS
3	T-07QB	TERMINAL	2 PCS	Ø4.8xw0.8t	COPPER ALLOY	TIN-PLATED
2	T-07QA	TERMINAL	1 PCS	Ø4.8xw0.8t	COPPER ALLOY	TIN-PLATED
1		HOUSING	6.0g	SNAP-IN TYPE	P666	THERMOPLASTIC

		<b>深圳市仁达电子有限公司</b> SHEN ZHEN STEADY ELECTRONICS CORPORATION	
TOLERANCE: UNLESS OTHERWISE MARKED DIMENSION: 0~6 : ±0.1 6~30 : ±0.2 30~120: ±0.3		PART NO.: 2111-PQ6-G NAME: SNAP-IN TYPE AC INLET 3P	

MATERIAL: SEE ABOVE  
 SPEC: \_\_\_\_\_

APPROVED: \_\_\_\_\_ CHECKED: \_\_\_\_\_ DRAW BY: 谢莉萍 JOB NO.: \_\_\_\_\_  
 08/05/15

REV	DATE	DESCRIPTION	WRITE	APPO.
A.0	2008.05.15	REV. DRAWING	谢莉萍	