A:MATERIAL:
1. HOUSING:NYLON66 UL 94V-2 STD(UL 94V-0 ON REQUEST)
2. TERMINAL:COPPER ALLOY

B:CHARACTERISTICS:
1. RATING:2.5A250V AC
2. INSULATION RESISTANCE: 2000V AC 0.5mA AT 1 MINUTE
3. DIELECTRIC STRENGTH OVER 100MΩ AT 500V DC
C:APPROVALS:
UL, VDE, SEMKO,DEMKO,NEMKO, SEV,CCC,KTL
D:ORDERING OPITION

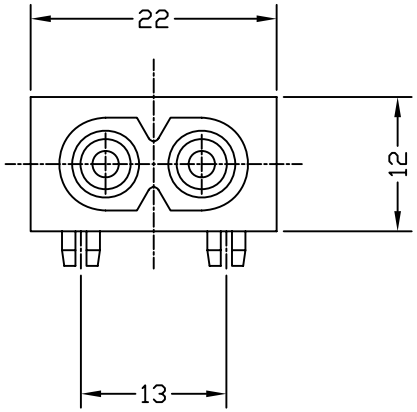



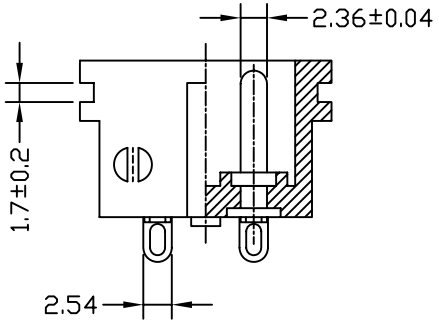

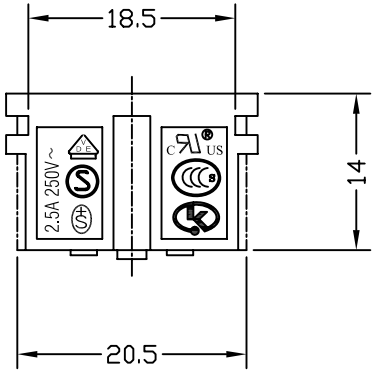

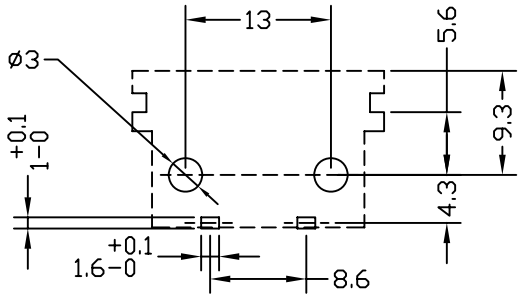

PCB LAYOUT



ITEM	PART NO.	PART NAME	Q'TY	SPECIFICATION	MATERIAL	REMARKS
3	T-23PS	TERMINAL	2PCS	PCB TYPE	COPPER ALLOY	TIN-PLATED
2	T-20-1P	TERMINAL	2PCS	Ø 2.36	COPPER ALLOY	Ni-PLATED
1	H-23-2P-G	HOUSING	3.0 g	SNAP-IN TYPE	PA66	THERMOPLASTIC

深圳市仁达电子有限公司
SHEN ZHEN STEADY ELECTRONICS CORPORATION

PART NO.: 2123-2-PS-G

NAME: SNAP-IN TYPE AC INLET 2P

TOLERANCE UNLESS OTHERWISE MARKED
DIMENSION: ANGULAR
0 ~ 6 : ±0.1 ±0.5
6 ~30 : ±0.2
30~120: ±0.3

MATERIAL: SEE ABOVE

SPEC.: —

APPROVED	CHECKED	DRAW BY	JOB NO.:
		谢莉萍 08/05/14	

A4	UNIT: mm	SCALE 1:1	SHEET 1 OF 1

REV	DATE	DESCRIPTION	WRITE	APPD.
A.0	2008.06.14	RE DRAWING	谢莉萍	