


- A: MATERIAL:
 1. HOUSING: PBT WITH +30% GLASS FIBER UL 94V-0
 2. TERMINAL: COPPER ALLOY
- B: CHARACTERISTICS:
 1. RATING: 2.5A/250V AC
 2. INSULATION RESISTANCE, DIELECTRIC STRENGTH PER APPROVAL SHEET

C: APPROVALS:
 UL, CSA, VDE, SEMKO, SEV, NEMKO, DEMKO, FIMKO, CCC

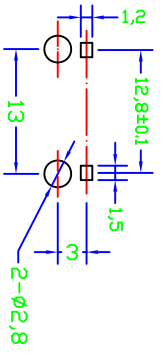

PCB LAYOUT

ITEM	PART NO.	PART NAME	QTY	SPECIFICATION	MATERIAL	REMARKS
3	T-20-1R1	TERMINAL	2PCS	PCB TYPE	COPPER ALLOY	TIN-PLATED
2	T-20-1P	TERMINAL	2PCS	Ø 2.36	COPPER ALLOY	N-PLATED
1	H-23-P-P3-WH-G	HOUSING	4.31g	SNAP-IN TYPE	PBT+30 %GF	THERMOPLASTIC

深圳市仁达电子有限公司
 SHEN ZHEN STEADY ELECTRONICS CORPORATION

PART NO.: 2123-PP3-G
 NAME: SNAP-IN TYPE AC INLET 2P

MATERIAL: SEE ABOVE
 SPEC.: WHITE

REV	DATE	DESCRIPTION	WRITE	APPD.
A.0	2008.07.14	RF DRAWING	谢莉萍	

UNIT:	SCALE	SHEET	APPROVED	CHECKED	DRAW BY	JOB NO.:
mm	1:1	1 OF 1			谢莉萍	