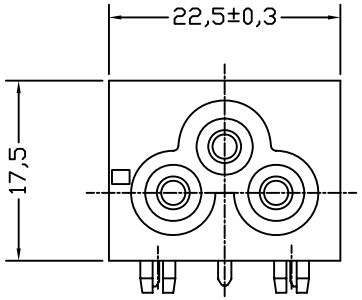

THICKNESS: 1.2~1.6t

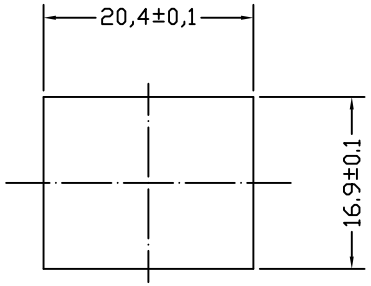

PANEL CUT-OUT

A:MATERIAL:
1. HOUSING:PA66 UL 94V-2
2. TERMINAL:COPPER ALLOY

B:CHARACTERISTICS:
1. RATING:2.5A250V AC
2. INSULATION RESISTANCE: OVER 100M Ω 500V DC
3.DIELECTRIC STRENGTH: 2000V AC ONE MINUTE

C:APPROVALS:
UL, CSA, VDE, SEMKO, SEV , NEMKO, DEMKO, FIMKO, CCC

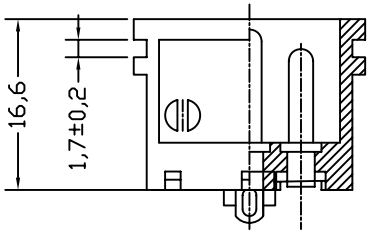





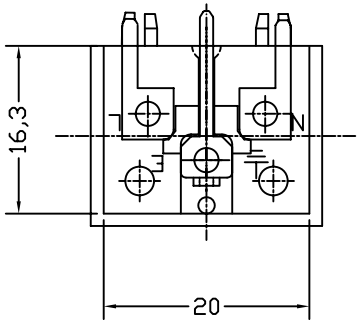

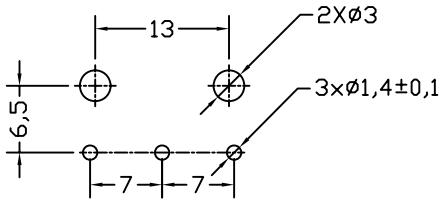

PCB LAYOUT

ITEM	PART NO.	PART NAME	Q'TY	SPECIFICATION	MATERIAL	REMARKS
5	T-24RB	TERMINAL	2PCS	P.C.B	COPPER ALLOY	TIN-PLATED
4	T-24PS	TERMINAL	1PCS	P.C.B	COPPER ALLOY	TIN-PLATED
3	T-24PB	TERMINAL	2PCS		COPPER ALLOY	Ni-PLATED
2	T-24PA	TERMINAL	1PCS		COPPER ALLOY	Ni-PLATED
1	H-24-P-G	HOUSING	3.4g	SNAP-IN TYPE	PA66	THERMOPLASTIC

深圳市仁达电子有限公司
SHEN ZHEN STEADY ELECTRONICS CORPORATION

TOLERANCE UNLESS OTHERWISE MARKED
DIMENSION: ANGULAR
0 ~ 6 : ±0.1 ±0.5
6 ~30 : ±0.2
30~120: ±0.3

REV	DATE	DESCRIPTION	APPD.
A.0	2008.05.26	RE DRAWING	

PART NO.:	NAME:
2124-PSL-G	AC INLET 3P WITH P.C.B
MATERIAL: SEE ABOVE	SPEC.: —

APPROVED	CHECKED	DRAW BY	JOB NO.:
		谢莉萍 08/05/28	2124-PS

A4	UNIT: mm	SCALE 1:1	SHEET 1 OF 1