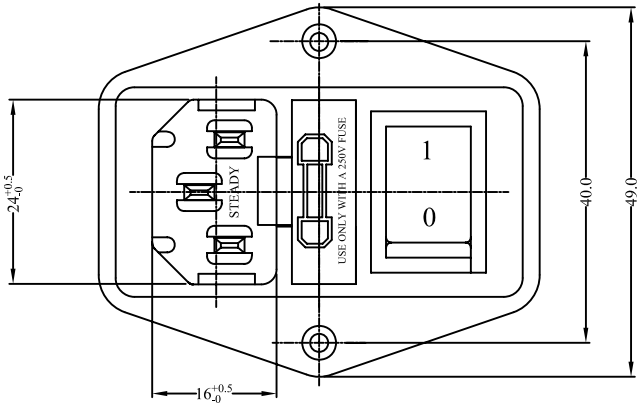

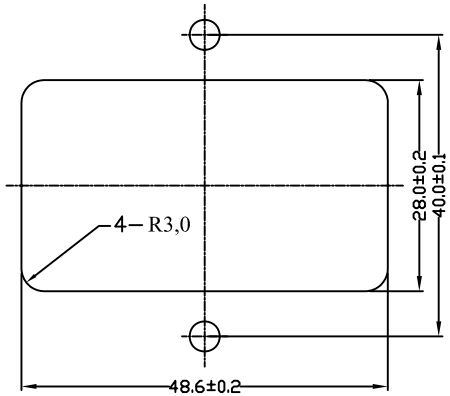

安装孔

A:MATERIAL:
1. HOUSING:PA66 UL 94V-2 STD(94V-0 REQUEST)
2. TERMINAL:COPPER ALLOY

B:CHARACTERISTICS:
1. RATING:10A250V AC
2. INSULATION RESISTANCE:100M Ω 500V DC
DIELECTRIC STRENGTH:AC2000V 0.5mA 1 MINUTE
3. FUSE:Ø5x20mm

C:APPROVALS:
CCC

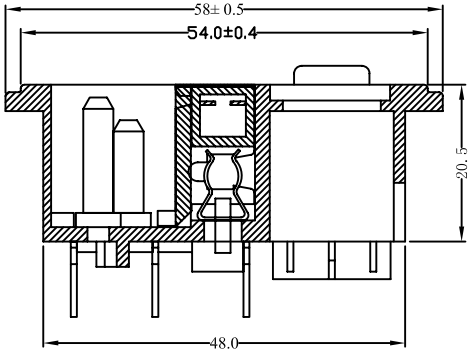

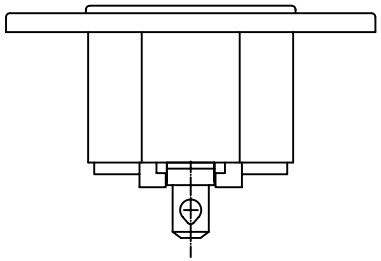

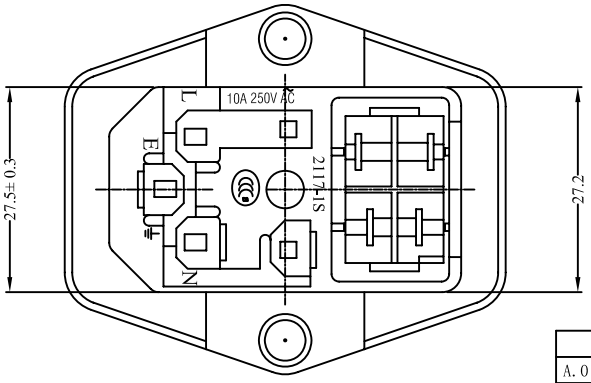



MAINS



TERMINAL

ITEM	PART NO.	PART NAME	QTY	SPECIFICATION	MATERIAL	REMARKS
8	T-07RQ	TERMINAL	3PCS	Ø4.8x0.8t	COPPER ALLOY	TIN-PLATED
7	T-13RJ1	TERMINAL	1PCS	Ø5.0x0.5t	COPPER ALLOY	NIC-PLATED
6	T-13RT	TERMINAL	2PCS		COPPER ALLOY	Ni-PLATED
5	T-13FC1	TERMINAL	2PCS		COPPER ALLOY	Ni-PLATED
4	T-1207PB	TERMINAL	2PCS		COPPER ALLOY	TIN-PLATED
3	T-1207PA	TERMINAL	1PCS		COPPER ALLOY	TIN-PLATED
2	H-13FH1-G	FUSE HOLDER	1PCS		PA66	THERMOPLASTIC
1	H-17-1S-C-G	HOUSING	9.1g	SNAP-IN TYPE	PA66	THERMOPLASTIC

REV	DATE	DESCRIPTION	WRITE
A.0	2008.07.9	RE DRAWING	谢莉萍

深圳市仁达电子有限公司
SHEN ZHEN STEADY ELECTRONICS CORPORATION

PART NO.: 2117-1S-CQ1-G

NAME: AC INLET 3P WITH FUSE/SWITCH

TOLERANCE UNLESS OTHERWISE MARKED
DIMENSION: ANGULAR
0 ~ 6 : ±0.1 ±0.5
6 ~30 : ±0.2
30~120: ±0.3

MATERIAL: SEE ABOVE

SPEC.: —

A4	UNIT: mm	SCALE 1:1	SHEET 1 OF 1

APPROVED	CHECKED	DRAW BY	JOB NO.:
		谢莉萍 08/07/9	