



FOR FRONT MOUNTING USE

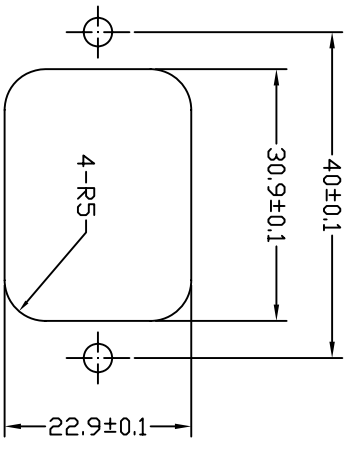

FOR REAR MOUNTING USE

PANEL CUT-OUT

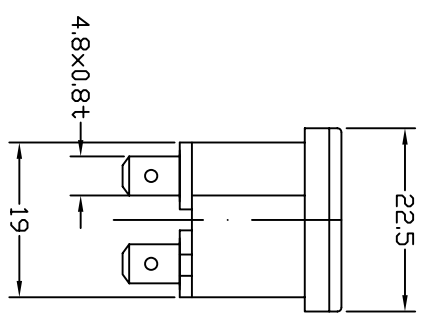

- A: MATERIAL:**
 1. HOUSING: PBT WITH 30% GF UL 94V-0
 2. TERMINAL: COPPER ALLOY
- B: CHARACTERISTICS:**
 1. RATING: 10A250V AC EUROPE
 15A250V AC NORTH AMERICA
 2. INSULATION RESISTANCE: OVER 100MΩ 500V DC
 DIELECTRIC STRENGTH: 2000V AC 0.5mA, 1 MINUTE
- C: APPROVALS:**
 UL, CSA, VDE, DEMKO, SEMKO, SEV, FIMKO & NEMKO CCC, KTL
- D: ORDERING OPTIONS:**

3	T-407QWB	TERMINAL	2PCS	Ø6.3xØ0.8t	COPPER ALLOY	TIN-PLATED
2	T-407QWA	TERMINAL	1PCS	Ø6.3xØ0.8t	COPPER ALLOY	TIN-PLATED
1		HOUSING	6.8g	SNAP-IN TYPE	PBT+30%GF	THERMOPLASTIC
ITEM	PART NO.	PART NAME	QTY	SPECIFICATION	MATERIAL	REMARKS

深圳市仁达电子有限公司
 SHEN ZHEN STEADY ELECTRONICS CORPORATION

TOLERANCE UNLESS OTHERWISE MARKED
 DIMENSION: ANGULAR ±0.5
 0~6 : ±0.1
 6~30 : ±0.2
 30~120 : ±0.3

A	4	UNIT: mm	SCALE 1:1	SHEET 1 OF 1	APPROVED	CHECKED	DRAW BY 谢莉萍	JOB NO.:
REV	DATE	DESCRIPTION	WRITE	APPD.				
A.0	2008.07.10	RE DRAWING	谢莉萍					